



REVISIONS								
REV.	DESCRIPTION	DATE	SIGNATURE					
Α		2014-09-04	AK					
В	ADDED WRITTEN INSTRUCTION	2015-10-26	AK					

- Position the RGSF frame flat to the bulkhead or deck.
  Tack weld on the front side of the frame in each corner and then in every 200 mm between corners.
  Continue welding around the front side of the frame in practical order.
  Complete by seal welding around the rear side of the frame

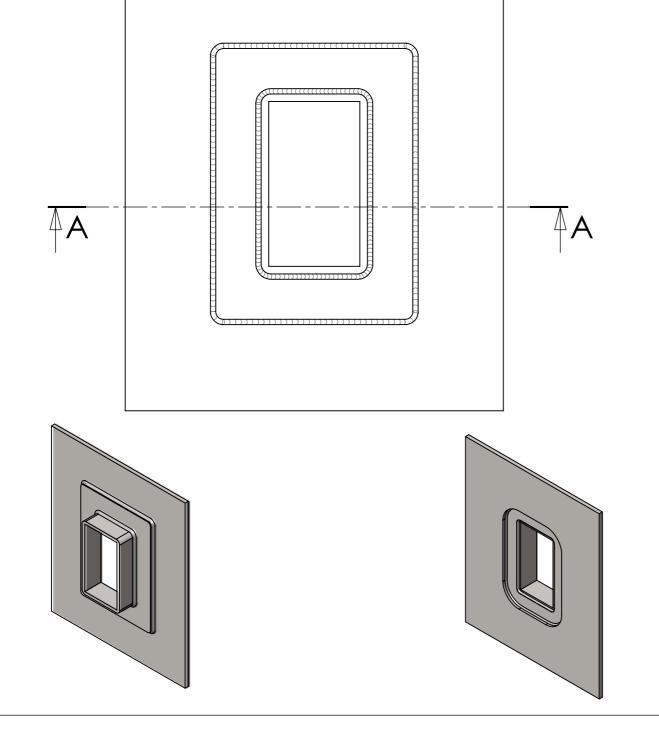

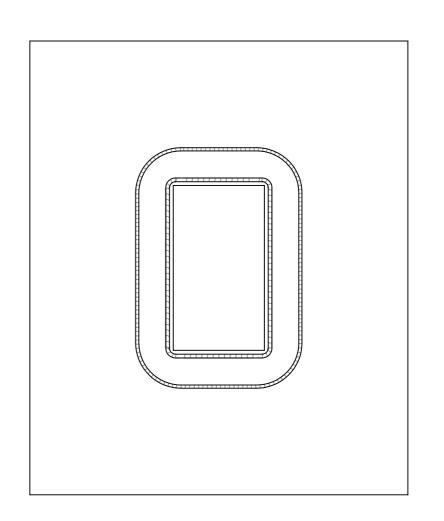

Ritad Drawn	Kontr. Check.	anskad	Godkänd Approv.	Tolerans där ej annat anges Tolerance unless othervise not stated.	Smst. nr. Assembly drawing no.	Ersätter Replaces	E +
2 2	중 근	Gr.	99			Ersatt av	Vikt
AK	AK	JF	ВЈ	Ytjämnhet där ej annat anges.	Material	Replaced of	Weight
AIV AIV		71 07	Surface finish othervise not stated.		Alla mått och uppgifter avser färdig produkt om ej annat anges		
140904	151026	151026	151026			All measures and other information refer to finished products unless othervise not stated.	
			$\overline{\mathbf{T}}$	WELD INSTRUCTION RGSF FRAMES		Kund ordernr. Customer order no	
	Į <u>V</u>			KUSFF	KAMES	Ritn. nr. Draw. no.	Rev.
BR	AIJ	BE	RG			1140371	В