


MCT Brattberg HandiPlug Datasheet

HandiPlug is used with the HandiBlock to act as a spare module.

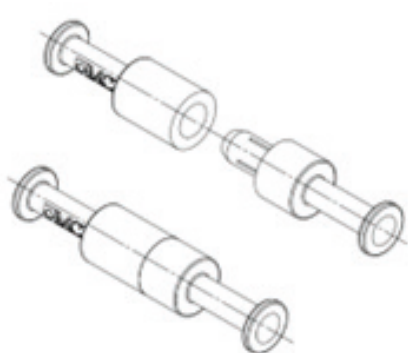

MCT Brattberg HandiPlug Datasheet

Data

Trade name:	MCT Brattberg HandiPlug
Variations:	HB20; HB30; HB40; HB60
Material:	GRP (Glass Reinforced Polymer)
Color:	Black
Working temperature:	-60 to +90 Degrees Celsius
Surface Treatment:	No surface treatment
Flammability:	V0, acc UL 94
Percentage of filler:	30wt% Glass fibre
Smoke index:	81.4
Mean Toxicity Index:	0.63 Per 100g Sample, Defence Standard 02-713 Issue 3

Chemical compatibility

Water:	Excellent
Oil:	Excellent
Ozone:	Not recommended
Sea water:	Excellent
Methanol:	Good
Chlorine:	Not recommended
Diesel:	Good
Gasoline:	Good
Acid:	Not recommended

HandiPlug is halogen free and flame retardant.

20240628OJ



Sweden

Head office
MCT Brattberg AB
Phone: +46 - 455 37 52 00
Email: info@mctbrattberg.se

Address
SE-371 92 Karlskrona, Sweden

United Kingdom

MCT Brattberg Ltd
Phone: +44 - 170 624 4890
E-mail: info@mctbrattberg.co.uk

Address
Commerce Street
Carrs Industrial Estate Haslingden
Lancashire BB4 5JT, England

USA

MCT Brattberg Inc
Phone: +1 346 260 9124
Email: sales@brattberginc.com

Address
3332 Spring Stuebner Rd.
Suite G, Spring, TX 77379, USA

Australia

MCT Brattberg Australia Pty Ltd
Phone: +61 (0)44 710 4422
Email: info@mctbrattberg.com.au

Address
Level 2, Margaret Graham Building
Lot Fourteen
1a Frome Road
Adelaide, SA 5000, Australia

United Arab Emirates

MCT Brattberg UAE
Dubai, United Arab Emirates
Phone: +971 50 277 2151
Email: sony.jose@mctbrattberg.ae

Please visit our website for contact information to your closest MCT Brattberg representative:

www.mctbrattberg.com